

Technical data

	operation when directly connected to chimney	
	HAKA 63/51W	HAKA 63/51WI
Energy label		
Operating data		
Nominal heat power / Power absorbed to water	14,5 / 9,5 kW	14,5 / 11 kW
Efficiency	> 80 %	> 80 %
Consumption of wood	3,8 kg/h	3,8 kg/h
Mass flow of flue gas	12 g/s	12 g/s
Required chimney pressure	12 Pa	12 Pa
Required amount of combustion air	35 m³/h	35 m³/h
Average flue gas temperature		
on the output	206 °C	206 °C
Heat distribution		
fireplace insert	17 %	7 %
door glass (single / double)	0 / 17 %	0 / 17 %
water	66 %	76 %
Water exchanger specifications		
Maximum working pressure	2,5 bar	2,5 bar
Minimum return water temperature	60 °C	60 °C
Water capacity	60 liters	60 liters
Connection input / output	1" / 1"	1" / 1"
Information for builds		
Minimal grill area supply / outgoing (with vent. grill)	350 / 400 cm²	300 / 350 cm²
Minimum radiant area ³ (without vent. grill)	suitable	suitable
Minimum distance from insulated areas / floor	40 / 0 mm	20 / 0 mm
Reference insulation ¹ ceiling / back wall / side wall / floor	100 / 60 / 60 / 0 mm	80 / 40 / 40 / 0 mm
Calciumsilicate insulation ² ceiling / back wall / side wall / floor	75 / 45 / 45 / 0 mm	60 / 25 / 25 / 0 mm
General technical information		
Total weight / lining weight	circa 322 / 96 kg	circa 330 / 96 kg
Burning chamber dimensions (width x depth)	525 x 315 mm	
Combustion air connection	Ø 125 mm	
Use in non-ventilated accumulation builds according to craft rules	suitable ⁴	
Tested according to	EN 16510-1 ed. 2:2023, EN 16510-2-2:2022	
Meets values	1. BImSchV (Stufe2), 15a BVG	

¹ Mineral wool according to AGI-Q 132

² Example SkamoEnclosure Board 225 kg/m³

³ Depends on accumulation period and material characteristics. Listed values calculated with average specific heat output = approx. 500 W/m²

⁴ With regard to the inspection capability and maximum ambient temperatures of the external switching devices (e.g. TAS/SV)

Technical data

	operation when directly connected to chimney	
	HAKA 63/51W+	HAKA 63/51WI+
Energy label		
Operating data		
Nominal heat power / Power absorbed to water	22 / 13 kW	22 / 16 kW
Efficiency	> 80 %	> 80 %
Consumption of wood	6 kg/h	6 kg/h
Mass flow of flue gas	18 g/s	18 g/s
Required chimney pressure	12 Pa	12 Pa
Required amount of combustion air	55 m³/h	55 m³/h
Average flue gas temperature		
on the output	240 °C	240 °C
Heat distribution		
fireplace insert	21 %	7 %
door glass (single / double)	0 / 20 %	0 / 20 %
water	59 %	73 %
Water exchanger specifications		
Maximum working pressure	2,5 bar	2,5 bar
Minimum return water temperature	60 °C	60 °C
Water capacity	60 liters	60 liters
Connection input / output	1,5 / 1,5 Zoll	1,5 / 1,5 Zoll
Information for builds		
Minimal grill area supply / outgoing (with vent. grill)	600 / 700 cm²	500 / 600 cm²
Minimum radiant area ³ (without vent. grill)	suitable	suitable
Minimum distance from insulated areas / floor	40 / 0 mm	20 / 0 mm
Reference insulation ¹ ceiling / back wall / side wall / floor	80 / 40 / 40 / 0 mm	80 / 40 / 40 / 0 mm
Calciumsilicate insulation ² ceiling / back wall / side wall / floor	60 / 25 / 25 / 0 mm	60 / 25 / 25 / 0 mm
General technical information		
Total weight / lining weight	circa 322 / 96 kg	circa 330 / 96 kg
Burning chamber dimensions (width x depth)	525 x 315 mm	
Combustion air connection	Ø 150 mm	
Use in non-ventilated accumulation builds according to craft rules	suitable ⁴	
Tested according to	EN 16510-1 ed. 2:2023, EN 16510-2-2:2022	
Meets values	1. BImSchV (Stufe2), 15a BVG	

¹ Mineral wool according to AGI-Q 132

² Example SkamoEnclosure Board 225 kg/m³


³ Depends on accumulation period and material characteristics. Listed values calculated with average specific heat output = approx. 500 W/m²

⁴ With regard to the inspection capability and maximum ambient temperatures of the external switching devices (e.g. TAS/SV)


HAKA 63/51W

Technical data
Date 06/2026

HAKA 63/51W

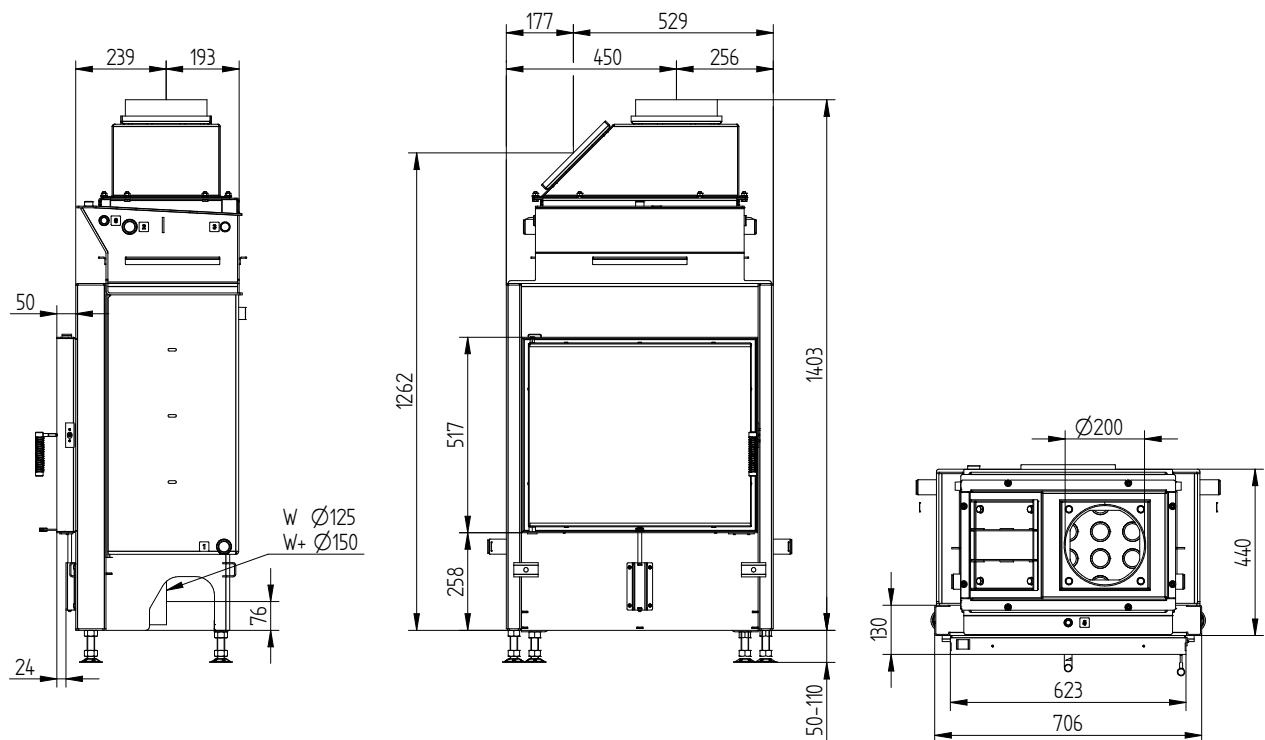


HAKA 63/51WI insulation

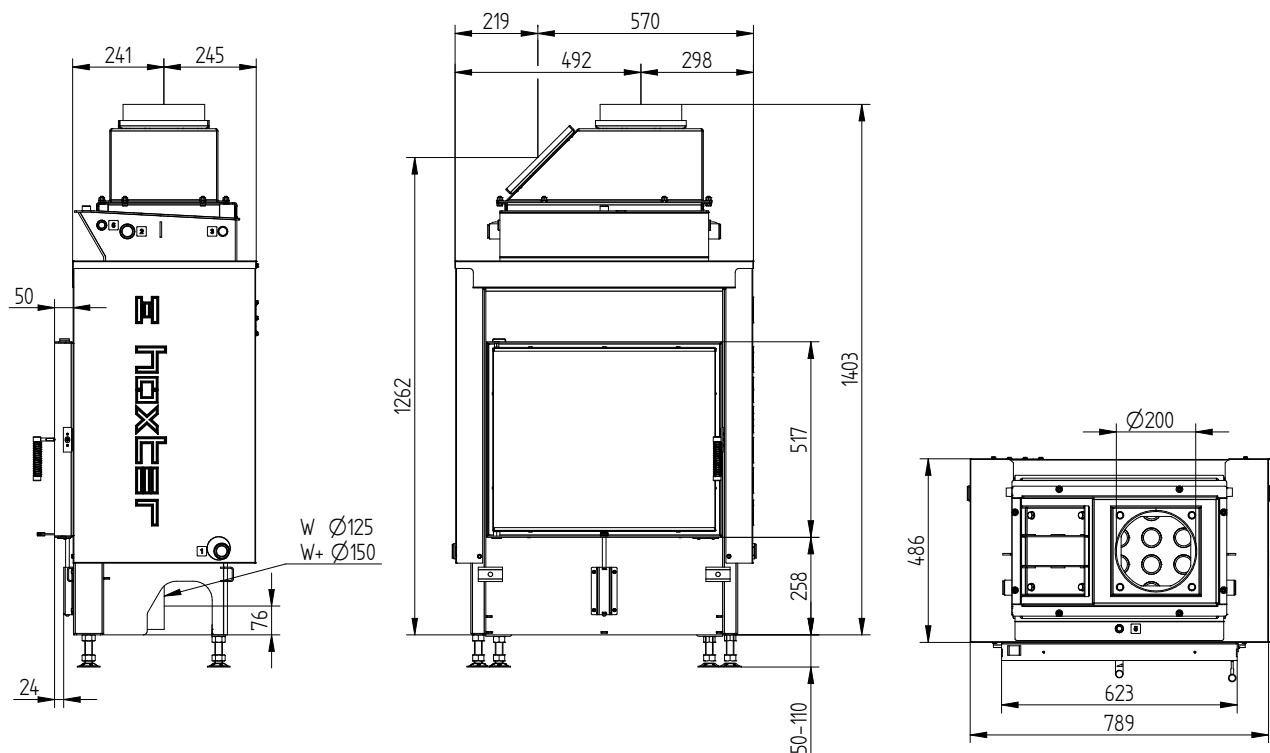


HAKA 63/51W

Technical data
Date 06/2026


HAKA 63/51W feet / WTR water exchanger cleaner

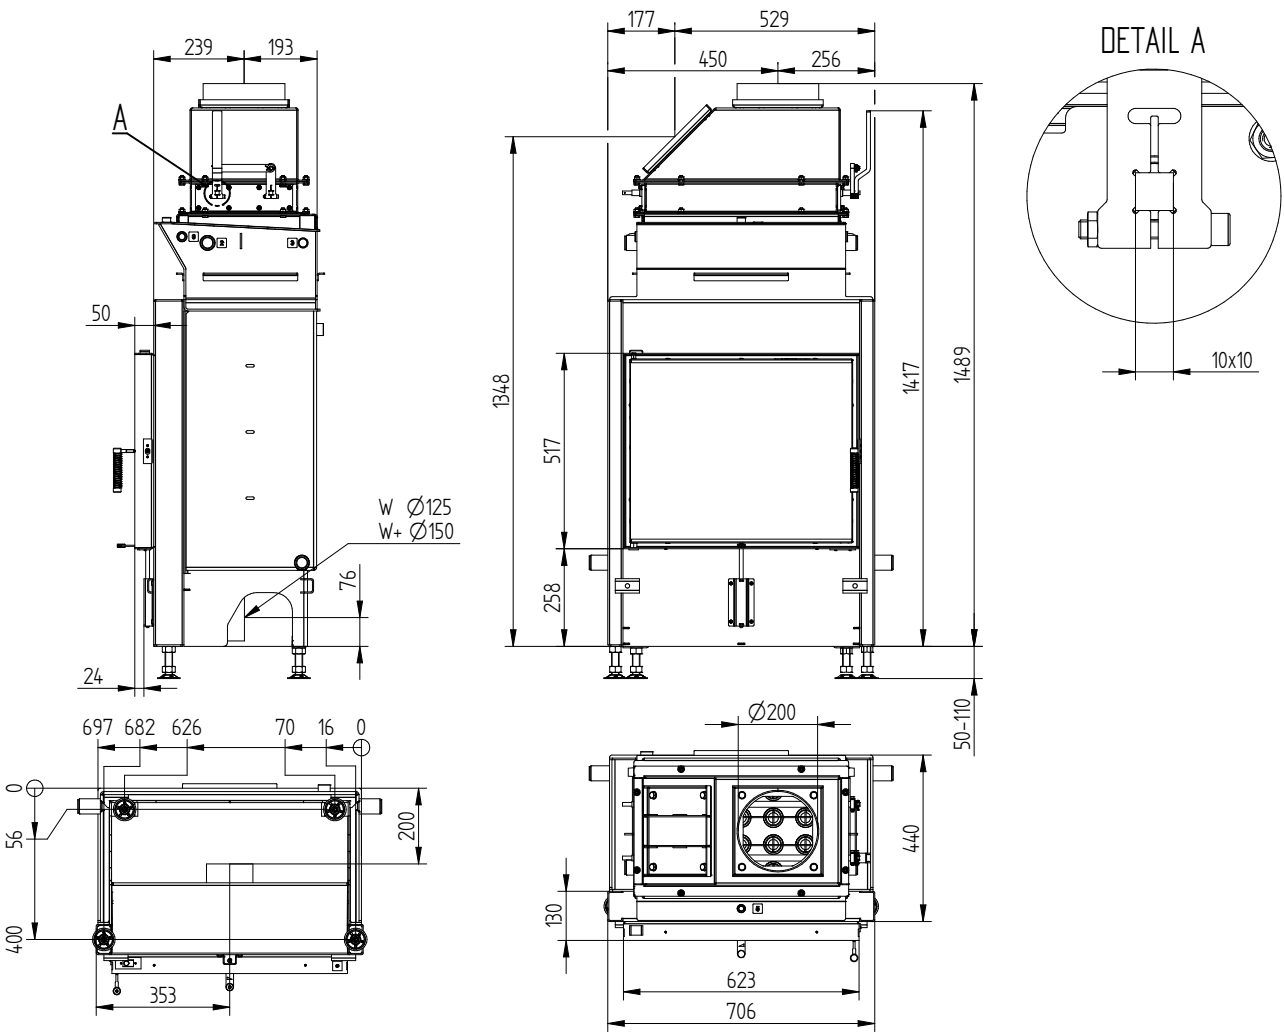


HAKA 63/51W insulation / feet / WTR water exchanger cleaner

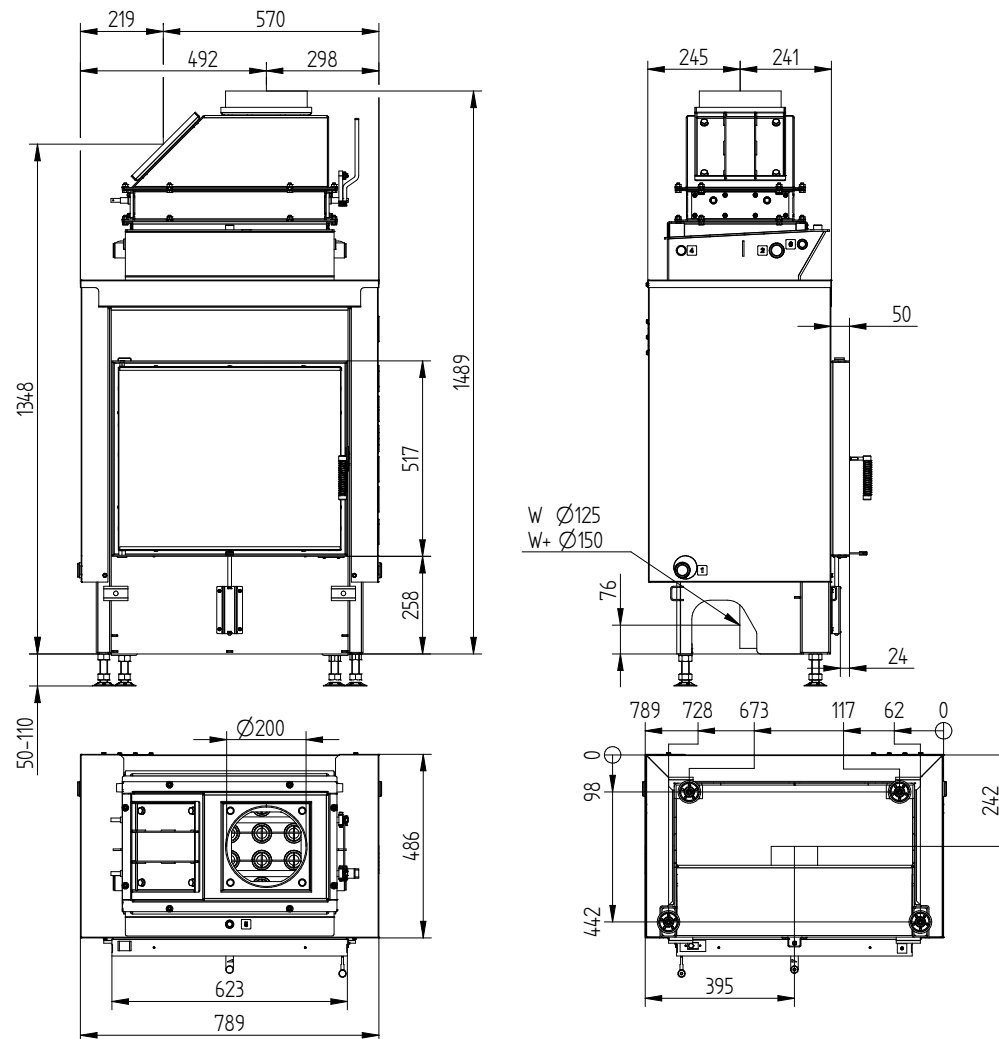

Cover frame 63/51 4sides 50 mm 1 x 90°

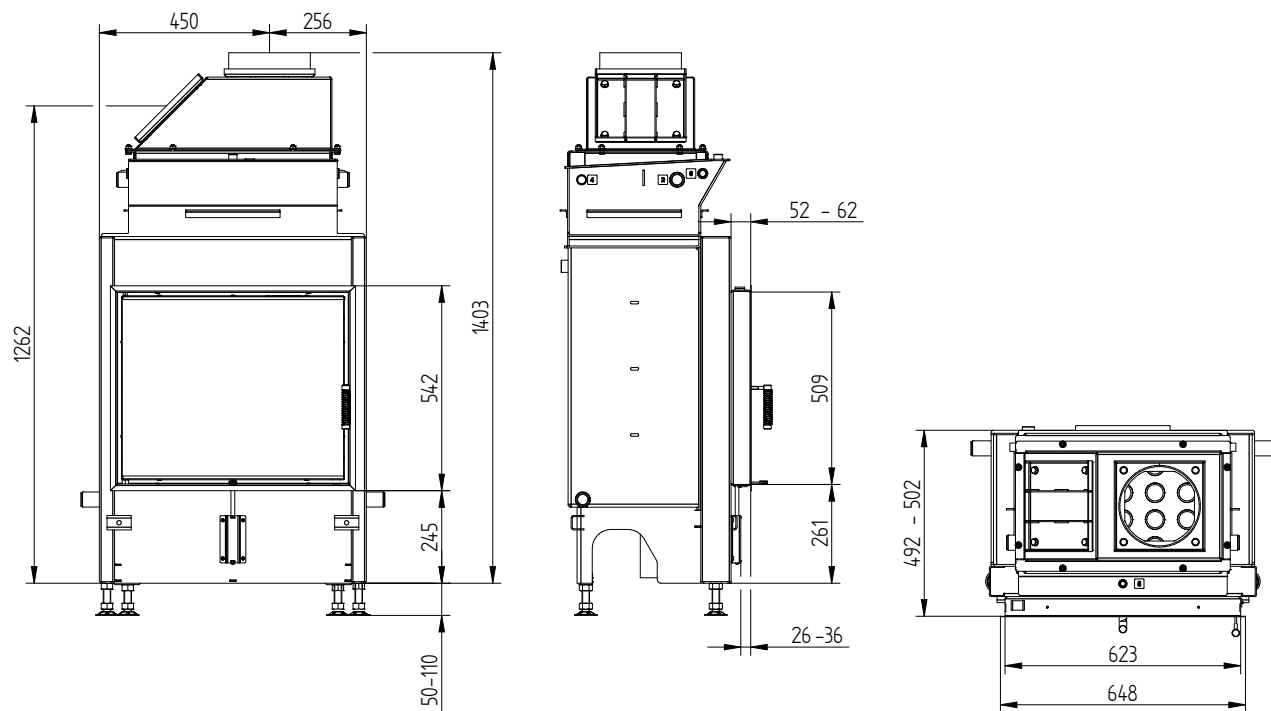


Cover frame 63/51 4sides 80 mm 2 x 45°

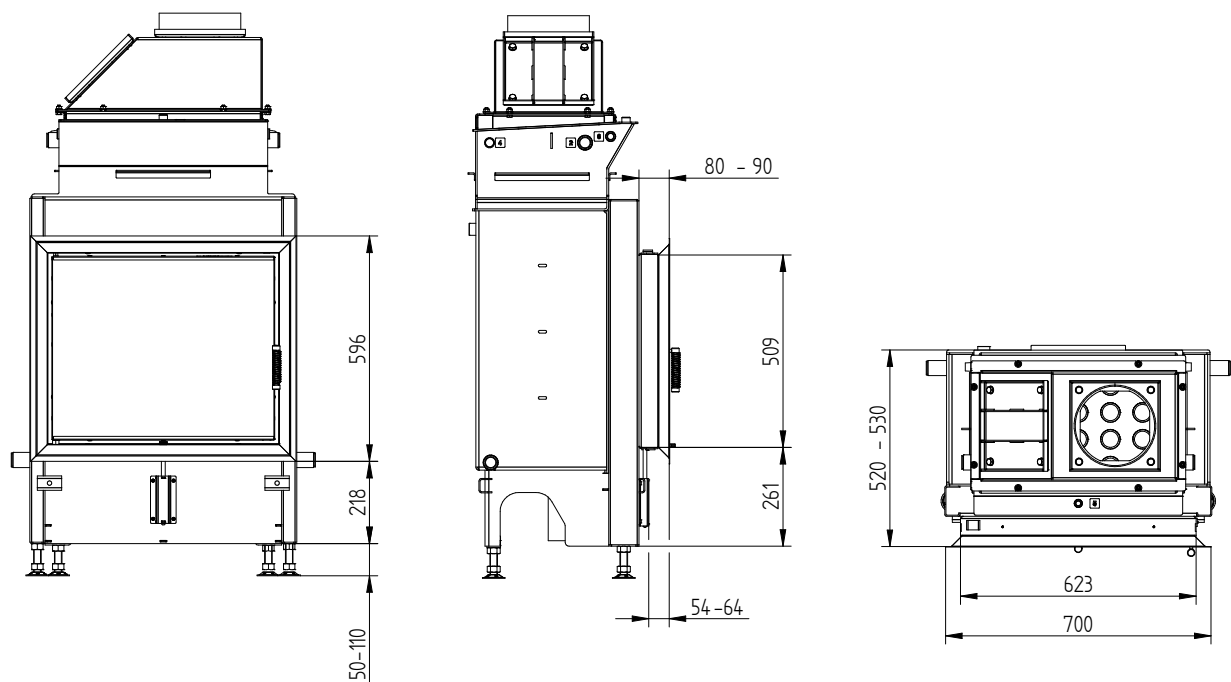

HAKA 63/51W

Technical data
Date 06/2026

HAKA 63/51W

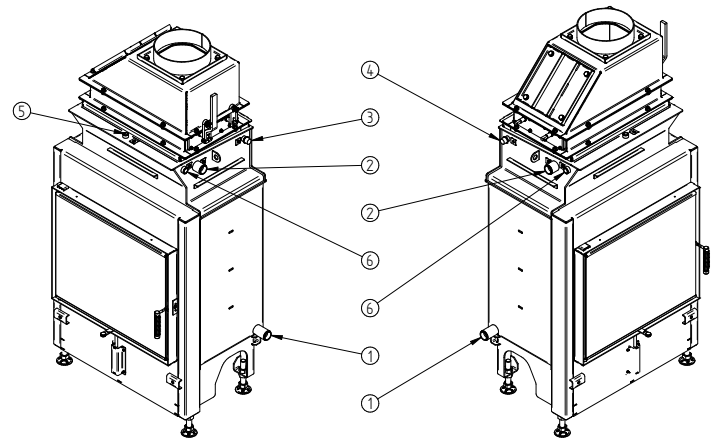

Nr.	Thread size	Description
1	G 1" (AG)	Water supply from heating system - min. 60°C
2	G 1" (AG)	Hot water supply to heating system
3	G 1/2" (AG)	Water supply from the waterlines into the cooling loop
4	G 1/2" (AG)	Discharge of water from the cooling loop into the waste
5	G 3/8" (IG)	Pocket for air vent valve
6	G 1/2" (IG)	Pocket for thermal sensors