

Technical data

	operation when directly connected to chimney	
	HAKA 78/57W	HAKA 78/57WI
Energy label		
Operating data		
Nominal heat power / Power absorbed to water	12,5 / 7 kW	12,5 / 8,1 kW
Efficiency	> 80 %	> 80 %
Consumption of wood	3,8 kg/h	3,8 kg/h
Mass flow of flue gas	10,6 g/s	10,6 g/s
Required chimney pressure	12 Pa	12 Pa
Required amount of combustion air	35 m³/h	35 m³/h
Average flue gas temperature		
on the output	186 °C	186 °C
Heat distribution		
fireplace insert	22 %	13 %
door glass (single / double)	0 / 22 %	0 / 22 %
water	56 %	65 %
Water exchanger specifications		
Maximum working pressure	2,5 bar	2,5 bar
Minimum return water temperature	60 °C	60 °C
Water capacity	75 liters	75 liters
Connection input / output	1" / 1"	1" / 1"
Information for builds		
Minimal grill area supply / outgoing (with vent. grill)	300 cm²	250 cm²
Minimum radiant area ³ (without vent. grill)	suitable	suitable
Minimum distance from insulated areas / floor	40 / 0 mm	20 / 0 mm
Reference insulation ¹ ceiling / back wall / side wall / floor	100 / 60 / 60 / 0 mm	100 / 60 / 60 / 0 mm
Calciumsilicate insulation ² ceiling / back wall / side wall / floor	75 / 45 / 45 / 0 mm	75 / 45 / 45 / 0 mm
General technical information		
Total weight / lining weight	circa 385 / 113 kg	circa 400 / 113 kg
Burning chamber dimensions (width x depth)	705 x 305 mm	
Combustion air connection	Ø 125 mm	
Use in non-ventilated accumulation builds according to craft rules	suitable ⁴	
Tested according to	EN 16510-1 ed. 2:2023, EN 16510-2-2:2022	
Meets values	1. BImSchV (Stufe2), 15a BVG	

¹ Mineral wool according to AGI-Q 132

² Example SkamoEnclosure Board 225 kg/m³

³ Depends on accumulation period and material characteristics. Listed values calculated with average specific heat output = approx. 500 W/m²

⁴ With regard to the inspection capability and maximum ambient temperatures of the external switching devices (e.g. TAS/SV)

Technical data

	operation when directly connected to chimney	
	HAKA 78/57W+	HAKA 78/57WI+
Energy label		
Operating data		
Nominal heat power / Power absorbed to water	22 / 10 kW	22 / 11 kW
Efficiency	> 80 %	> 80 %
Consumption of wood	6 kg/h	6 kg/h
Mass flow of flue gas	14,9 g/s	14,9 g/s
Required chimney pressure	12 Pa	12 Pa
Required amount of combustion air	55 m³/h	55 m³/h
Average flue gas temperature		
on the output	215 °C	215 °C
Heat distribution		
fireplace insert	24 %	20 %
door glass (single / double)	0 / 30 %	0 / 30 %
water	46 %	50 %
Water exchanger specifications		
Maximum working pressure	2,5 bar	2,5 bar
Minimum return water temperature	60 °C	60 °C
Water capacity	75 liters	75 liters
Connection input / output	1" / 1"	1" / 1"
Information for builds		
Minimal grill area supply / outgoing (with vent. grill)	600 cm²	500 cm²
Minimum radiant area ³ (without vent. grill)	suitable	suitable
Minimum distance from insulated areas / floor	40 / 0 mm	20 / 0 mm
Reference insulation ¹ ceiling / back wall / side wall / floor	120 / 80 / 80 / 0 mm	120 / 80 / 80 / 0 mm
Calciumsilicate insulation ² ceiling / back wall / side wall / floor	90 / 60 / 60 / 0 mm	90 / 60 / 60 / 0 mm
General technical information		
Total weight / lining weight	circa 385 / 113 kg	circa 400 / 113 kg
Burning chamber dimensions (width x depth)	705 x 305 mm	
Combustion air connection	Ø 150 mm	
Use in non-ventilated accumulation builds according to craft rules	suitable ⁴	
Tested according to	EN 16510-1 ed. 2:2023, EN 16510-2-2:2022	
Meets values	1. BImSchV (Stufe2), 15a BVG	

¹ Mineral wool according to AGI-Q 132

² Example SkamoEnclosure Board 225 kg/m³





³ Depends on accumulation period and material characteristics. Listed values calculated with average specific heat output = approx. 500 W/m²

⁴ With regard to the inspection capability and maximum ambient temperatures of the external switching devices (e.g. TAS/SV)

HAKA 78/57W

Technical data
Date 06/2026





HAKA 78/57W, HAKA 78/57W extra power+ / air inlet / feet

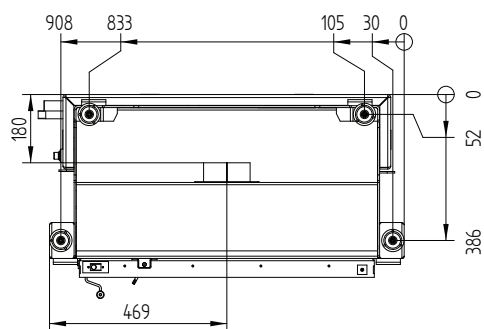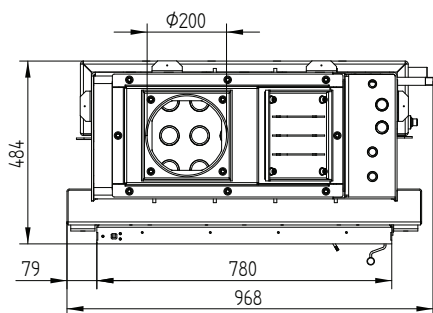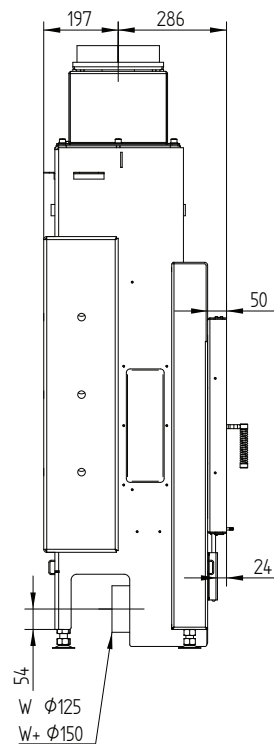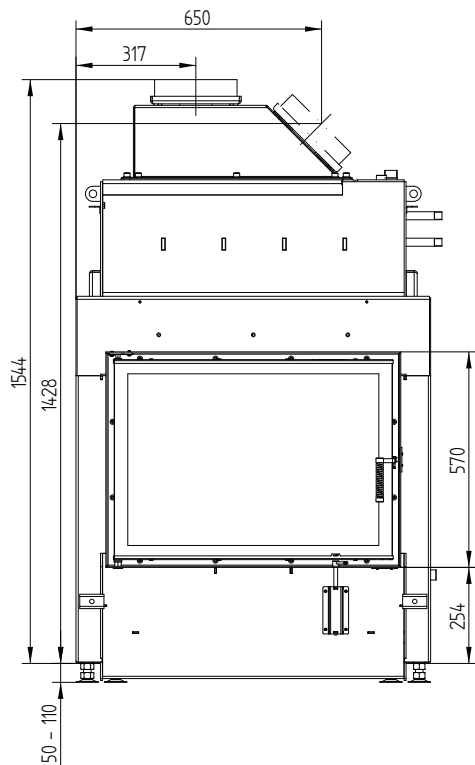


HAKA 78/57W

Technical data
Date 06/2026


HAKA 78/57WI insulation, HAKA 78/57WI insulation extra power+ / air inlet / feet

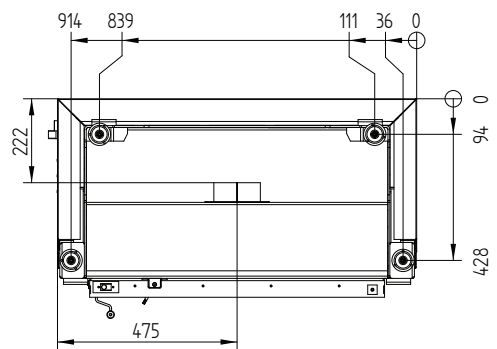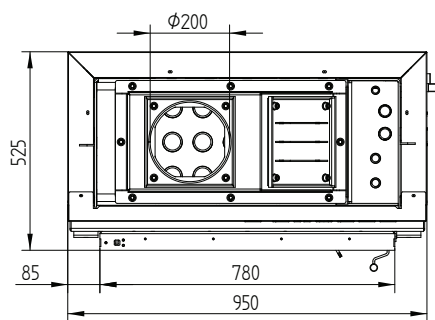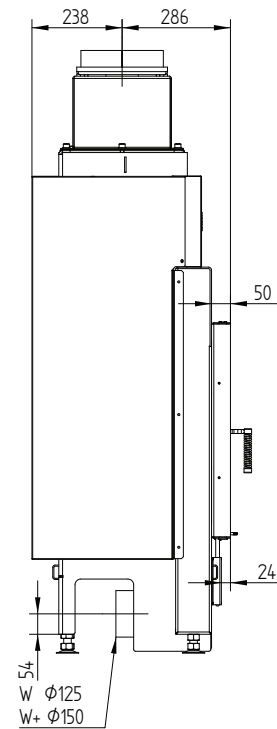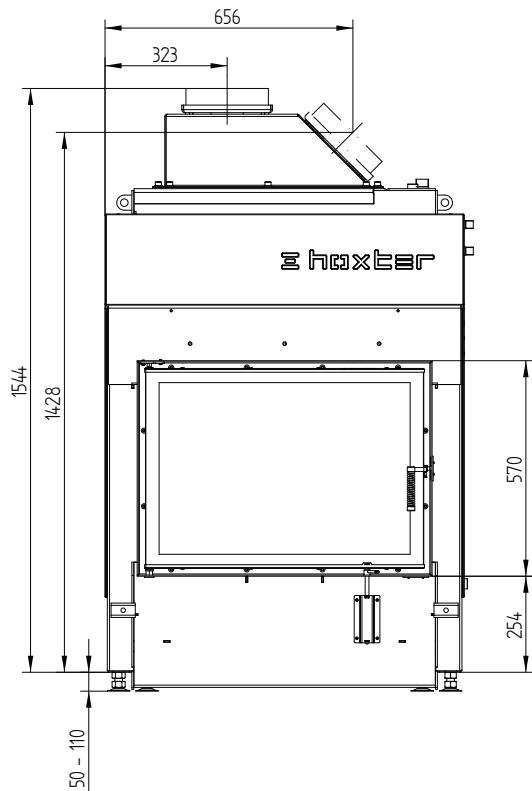

Cover frame 78/57 side opening 4sides 50 mm 1 x 90°

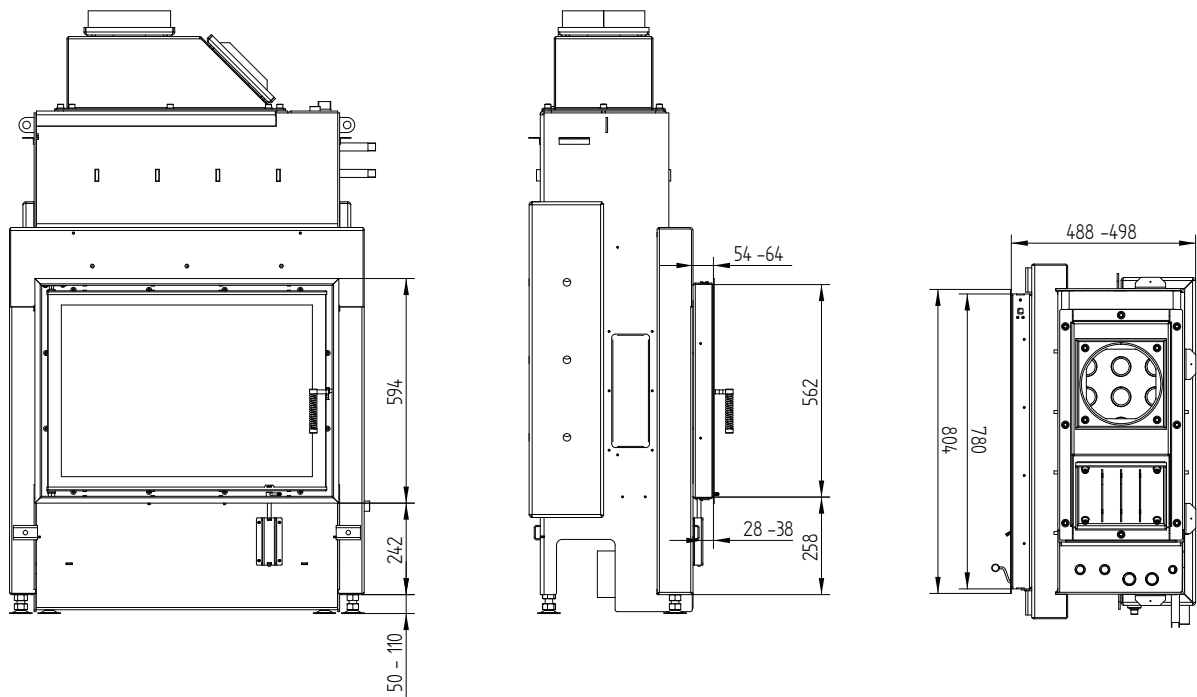



Cover frame 78/57 side opening 4sides 80 mm 1 x 90°

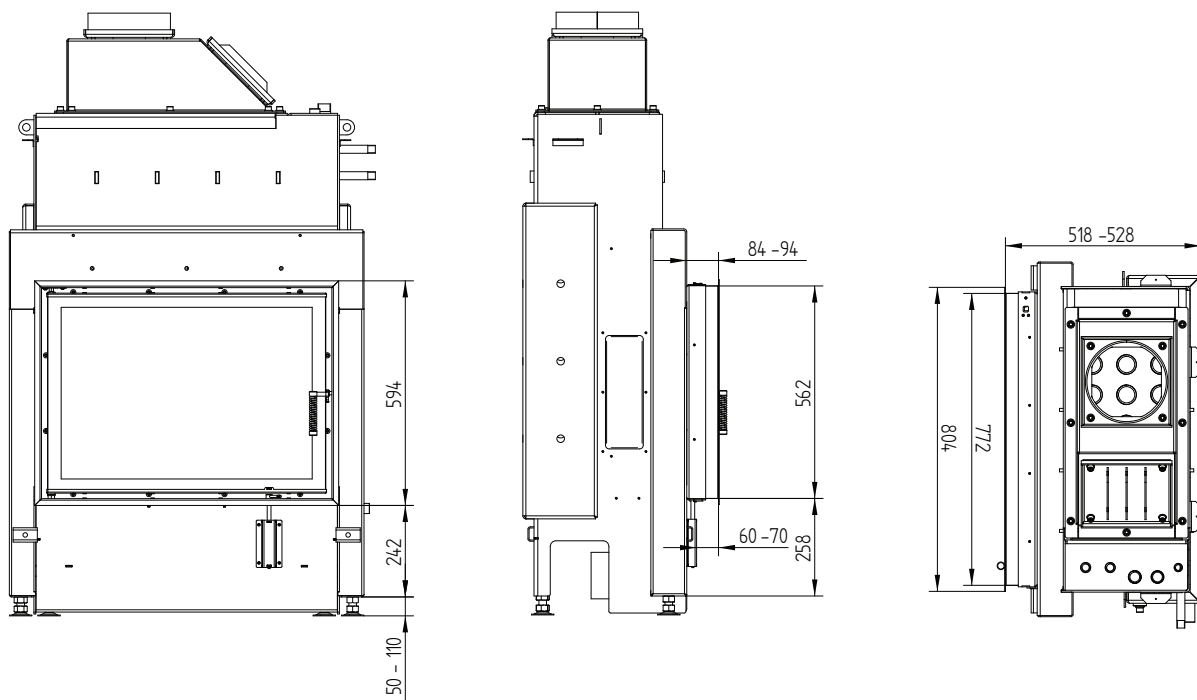

HAKA 78/57W

Technical data
Date 06/2026

Build-on frame 78/57 side opening 4sides 80 mm

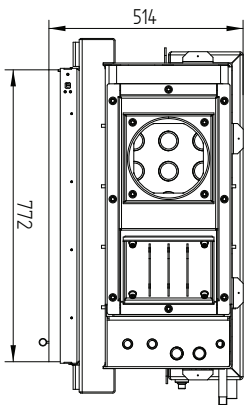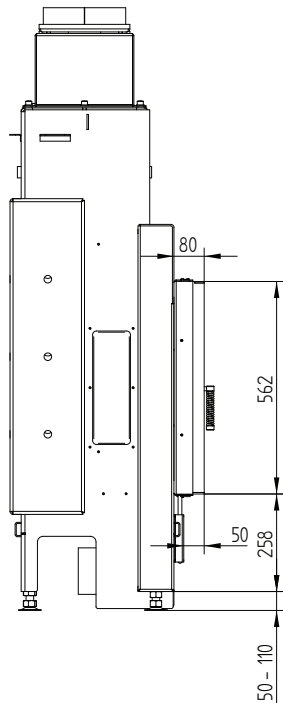

Nr.	Thread size	Description
1	G 1" (AG)	Water supply from heating system - min. 60 °C
2	G 1" (AG)	Hot water supply to heating system
3	G 1/2" (AG)	Water supply from the waterlines into the cooling loop
4	G 1/2" (AG)	Discharge of water from the cooling loop into the waste
5	G 3/8" (IG)	Pocket for air vent valve
6	G 1/2" (IG)	Pocket for thermal sensors
7	G 1/2" (IG)	Pocket for emptying

