



Ostro (W+)

Available from September 2020



Standard scope of delivery

- » Solid cast iron base
- » ORANIER Snap lock system
- » Profiled vermiculite firebox lining
- » Standard external combustion air connection

The connecting piece for external combustion air supply is not included in the scope of delivery.



Air-flow handle



Solid cast iron base

Optional




Can be extended by up to 3 additional segments (E-Blok or D-Blok).
Height: 172 mm per E-Blok.



E-Blok with heat accumulation stone



D-Blok without heat accumulation stone

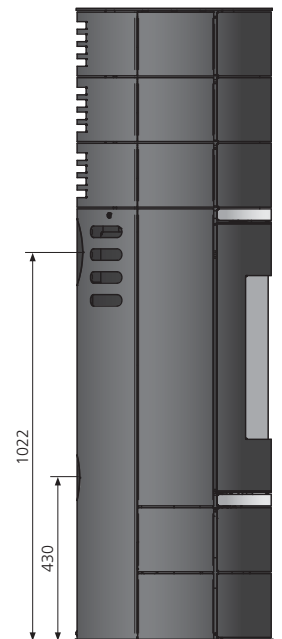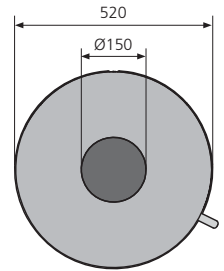

Technical Data

Energy efficiency class		A+
Connection possibility		top / rear
Operation with external air		rear / bottom
Nominal heat output	kW	6,5
Weight (incl. packaging)	kg	143
Room heating capacity	m ³	144
Length of logs	cm	33
Exhaust gas mass flow	g/s	6,4
Exhaust gas temperature	°C	302
Required discharge pressure	mbar	0,12

For all technical data please see pages 88 to 90.

Available design	Order number	EAN-Code
Ostro (W+)	5681 11	4029808605121
Optional accessories		
E-Blok (extension segment with W+)	9216 19	4029808605732
D-Blok (extension segment steel only)	9216 20	4029808605749
Connecting piece for external combustion air supply	9200 69	402980779991

